



DVR





codice	DVR-001a		DVR-001b	
descrizione	<p>4/8CH Standalone DVR with H.264 Compression Recording Resolution D1,Support HD1,CIF with triple encoding performance Support VGA and 1CH BNC video output High definition VGA output up to 1366*768@60fps Support Digital zoom in playback and live view Multi-protocols for PTZ and preset tour function Support 4/8CH playback simultaneously Max 2TB SATA HDD*1 and CMS software Support Mobile phone monitoring (Iphone/Blackberry/Andriod/Windows Mobile/Symbian OS)</p>		<p>4/8CH Standalone DVR with H.264 Compression Recording Resolution D1,Support HD1,CIF with triple encoding performance Support VGA and 1CH BNC video output High definition VGA output up to 1366*768@60fps Support Digital zoom in playback and live view Multi-protocols for PTZ and preset tour function Support 4/8CH playback simultaneously Max 2TB SATA HDD*1 and CMS software Support Mobile phone monitoring (Iphone/Blackberry/Andriod/Windows Mobile/Symbian OS)</p>	
codec	H.264		H.264	
Recording Frame Rate	PAL 100fps D1	NTSC 100fps D1	PAL 2D1+6CIF	NTSC 2D1+6CIF
Playback frame rate	25FPS		25FPS	
Playback all channel	4		1	
Viewer	----		----	
Software di gestione	CMS,IE Brower, Mobile		CMS,IE Brower, Mobile	
Internet VGA	SI		SI	
Alarm in/Out	4/1		4/1	
Video In/Out	4/1		8/1	
HDD DVD/CD-RW	Max 2TB SATA HDD*1		Max 2TB SATA HDD*1	



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	DVR-002		DVR-003a	
descrizione	<p>32 channels high performance standalone DVR Up to 32 cameras with full HD 1080P display H.264 video compression algorithm ideal Each channel at CIF and special channel at D1 recording Dual encoding streams supported TV(BNC)/VGA/HDMI synchronous video output 3D intelligent positioning with PTZ dome Alarm triggering screen tips, buzzer, PTZ, e-mail, FTP upload ,2 USB2.0 Support Mobile View Monitoring: Symbian s60 3rd, s60 5th, windows mobile 5.0 or above; Android; Iphone; Blackberry</p>		<p>Support dual stream network transmission, ADPCM audio compression Linux2.6 operation system, Graphics & Windows OSD interface Support remote view with Mobile Phone (Symbian S60 3rd system & Windows mobile system) Support PTZ control via built-in RS-485 port Remote Alarm Notification via Email Images, Point to point intercom Support D1 Recording with 4 channel</p>	
codec	H.264		H.264	
Recording Frame Rate	PAL 100 D1+700FPS CIF	NTSC 120 D1+840FPS CIF	PAL 25FPS D1, 50FPS HD1, 100FPS CIF	NTSC 30FPS D1, 60FPS HD1, 120FPS CIF
Playback frame rate	25FPS		25FPS	
Playback all channel	16		4	
Viewer	10		5	
Software di gestione	CMS,IE Brower, Mobile		CMS,IE Brower, Mobile	
Internet VGA	SI		SI	
Alarm in/Out	16/6		4/1	
Video In/Out	16/1		4/2	
HDD DVD/CD-RW	8 SATA ports, 8 HDDs or 6 HDDs + 1 CD/DVD-RW, Max 2TB per HDD supported		5604,5608 support 1*1TB SATA HDD 5616 support 2*1TB SATA HDD or 1*1TB SATA HDD and 1 DVDRW	



ETC – ECOLOGY



Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it

	 <p>A Casing A Default version(Casing)</p>			
codice	DVR-003b		DVR-004	
descrizione	<p>Support dual stream network transmission, ADPCM audio compression Linux2.6 operation system, Graphics & Windows OSD interface Support remote view with Mobile Phone (Symbian S60 3rd system & Windows mobile system) Support PTZ control via built-in RS-485 port Remote Alarm Notification via Email Images, Point to point intercom Support D1 Recording with 4 channel</p>		<p>Support dual stream network transmission, ADPCM audio compression Linux2.6 operation system, Graphics & Windows OSD interface Support remote view with Mobile Phone (Symbian S60 3rd system & Windows mobile system) Support PTZ control via built-in RS-485 port Remote Alarm Notification via Email Images, Point to point intercom Support D1 Recording with 4 channel</p>	
codec	H.265		H.266	
Recording Frame Rate	PAL 200FPS CIF	NTSC 240FPS CIF	PAL 400FPS CIF	NTSC 480FPS CIF
Playback frame rate	25FPS		25FPS	
Playback all channel	1		4	
Viewer	5		5	
Software di gestione	CMS,IE Brower, Mobile		CMS,IE Brower, Mobile	
Internet VGA	SI		SI	
Alarm in/Out	8/1		16/1	
Video In/Out	1/1		4/2	
HDD DVD/CD-RW	5604,5608 support 1*1TB SATA HDD 5616 support 2*1TB SATA HDD or 1*1TB SATA HDD and 1 DVDRW		5604,5608 support 1*1TB SATA HDD 5616 support 2*1TB SATA HDD or 1*1TB SATA HDD and 1 DVDRW	



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	DVR-005a		DVR-005b	
descrizione	G.722 Audio Compressions Video, audio and alarm input USB ,network backup Support mouse control RS485 and RS232 control Data Search by event, date and time, channel. Support remote view with Mobile Phone		G.722 Audio Compressions Video, audio and alarm input USB ,network backup Support mouse control RS485 and RS232 control Data Search by event, date and time, channel. Support remote view with Mobile Phone	
codec	H.264		H.264	
Recording Frame Rate	PAL 100FPS CIF	NTSC 120FPS CIF	PAL 100FPS CIF	NTSC 120FPS CIF
Playback frame rate	25FPS		25FPS	
Playback all channel	4		4	
Viewer	5		5	
Software di gestione	CMS,IE Brower, Mobile		CMS,IE Brower, Mobile	
Internet VGA	NO		SI	
Alarm in/Out	4/2		4/2	
Video In/Out	4/1		4/1	
HDD DVD/CD-RW	Support 1 HDD SATA, max 500G		Support 1 HDD SATA, max 500G	



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	DVR-005c		DVR-006a	
descrizione	<p>G.722 Audio Compressions Video, audio and alarm input USB ,network backup Support mouse control RS485 and RS232 control Data Search by event, date and time, channel. Support remote view with Mobile Phone</p>		<p>H.264 SOC solution, low consumption but strong function Linux real time operation system Abundant network transmission protocol, PPPoE, DHCP, TCP/UDP 4channel video & 4 channel audio playback @120FPS same time, fast forward, fast backward, slow speed playback VGA, monitor, S-video output same time Central Management Software supplied to preview, playback</p>	
codec	H.264		H.264	
Recording Frame Rate	PAL 200FPS CIF	NTSC 240FPS CIF	PAL 100FPS CIF	NTSC 120FPS CIF
Playback frame rate	25FPS		25FPS	
Playback all channel	4		4	
Viewer	5		5	
Software di gestione	IE Brower, Mobile		IE Brower	
Internet VGA	SI		SI	
Alarm in/Out	8/1		8/4	
Video In/Out	8/1		4/1	
HDD DVD/CD-RW	Support 1 HDD SATA, max 500G		SATA HDD 1T*4 supported ,MAX 1TB per HDD	



ETC – ECOLOGY



Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it

				
codice	DVR-006b		DVR-007	
descrizione	<p>H.264 SOC solution, low consumption but strong function Linux real time operation system</p> <p>Abundant network transmission protocol, PPPoE, DHCP, TCP/UDP 4channel video & 4 channel audio playback 120FPS same time, fast forward, fast backward, slow speed playback VGA, monitor, S-video output same time Central Management Software supplied to preview, playback</p>		<p>7" LCD, embedded DVR and LCD display two in one Remote surveillance, remote playback, remote control DVR ;IE, Various recording mode: timer, motion detection, alarm, and Recording picture quality, resolution & recording frame rate configurable</p> <p>Protocol: TCP/IP, DHCP, DDNS, PPPoE, Support multi lever user management Support mobile surveillance by phones with WinCE and 3G Low stream, Real time record a month with 250GB HDD</p>	
codec	H.264		H.264	
Recording Frame Rate	PAL 200FPS CIF	NTSC 240FPS CIF	PAL 100FPS CIF	NTSC 120FPS CIF
Playback frame rate	25FPS		25FPS	
Playback all channel	4		4	
Viewer	5		5	
Software di gestione	IE Brower,		CMS,IE Brower, Mobile	
Internet VGA	SI		SI	
Alarm in/Out	16/4		4/1	
Video In/Out	4/1		2/1	
HDD DVD/CD-RW	SATA HDD 1T*4 supported ,MAX 1TB per HDD		1 SATA HDD,MAX 1.5TB Per HDD	



ETC – ECOLOGY



Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it

				
codice	DVR-008a		DVR-008b	
descrizione	<p>8/16 channel CIF Resolution with 4-channel D1. Embedded real time operation system (RTOS) 1 CH VGA output (frequency 60 HZ, Resolution 1024x768) 16 CH video loop Input (BNC, 1.0Vp-p75Ω); 2 CH composite output (BNC, 1.0Vp-p75Ω),(optional) Alarm, Audio, IDE-to-SATA HDD Network, Ethernet 10/100M Auto</p>		<p>8/16 channel CIF Resolution with 4-channel D1. Embedded real time operation system (RTOS) 1 CH VGA output (frequency 60 HZ, Resolution 1024x768) 16 CH video loop Input (BNC, 1.0Vp-p75Ω); 2 CH composite output (BNC, 1.0Vp-p75Ω),(optional) Alarm, Audio, IDE-to-SATA HDD Network, Ethernet 10/100M Auto</p>	
codec	H.264		H.264	
Recording Frame Rate	PAL 200FPS CIF	NTSC 240FPS CIF	PAL 400FPS CIF	NTSC 480FPS CIF
Playback frame rate	25FPS		25FPS	
Playback all channel	8		4	
Viewer	10		5	
Software di gestione	IE Brower,		CMS,IE Brower, Mobile	
Internet VGA	SI		SI	
Alarm in/Out	8/4		4/1	
Video In/Out	8/1		2/1	
HDD DVD/CD-RW	support 4 HDD (Max 1TB per HDD),USB &DVD back up		support 4 HDD (Max 1TB per HDD),USB &DVD back up	



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



MICRO-TELECAMERE





codice	MT-001a	MT-001b	MT-001c
colore	bianco	bianco	bianco
descrizione	1/3" Sony Color CCD 600TVL OSD,0.01lux,Digital WDR, High Light inhibited	1/3" Sony Color CCD 600TVL 0.01lux,Digital WDR, High Light inhibited	1/3" Sony Color CCD 540TVL 0.1Lux
dimensioni	Φ116*93mm	Φ116*93mm	Φ116*93mm
voltaggio	DC12V/AC24V	DC12V 150mA DC12V1A	DC12V 150mA DC12V1A
lente	4-9mm Lens	4-9mm Lens	4-9mm Lens
IR led	OSD	18EA LED 20M	18EA LED 20M
CCD	639+RJ9	639+RJ7	639+2010
involucro	antivandalico	antivandalico	antivandalico



codice	MT-002a	MT-002b	MT-002c
colore	Grigio/bianco	Grigio/bianco	Grigio/bianco
descrizione	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 540TVL	1/3" Sony Color CCD 480TVL
dimensioni	D60*H58mm	D60*H58mm	D60*H58mm
voltaggio	DC12V 120mA DC12V1A	DC12V 120mA DC12V1A	DC12V 120mA DC12V1A
lente	2.8/3.6mm Lens 0Lux	2.8/3.6mm Lens 0Lux	2.8/3.6mm Lens 0Lux
IR led	6xΦ5EA LED 5-10M	6xΦ5EA LED 5-10M	6xΦ5EA LED 5-10M
CCD	639+2040	639+2010	633+2010
involucro	antivandalico	antivandalico	antivandalico



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	MT-003a	MT-003b	MT-003c
descrizione	1/3" Sony Color CCD 540TVL 0.05Lux	1/3" Sony Color CCD 540TVL	1/3" Sony Color CCD 480TVL
dimensioni	95(H)*95(D)mm	95(H)*95(D)mm	95(H)*95(D)mm
voltaggio	DC12V 100mA Adapter DC12V1A	DC12V 100mA Adapter DC12V1A	DC12V 100mA Adapter DC12V1A
lente	lowLux	-	-
IR led	no	no	no
CCD	639+2010	409+2010	405AK+2010
involucro	antivandalo	antivandalo	antivandalo



codice	MT-003d	MT-003e	MT-003f
descrizione	1/3" Sony Color CCD 420TVL 0.05Lux	1/3" Sony Super-HAD 420TVL	1/4" Sharp Color CCD 420TVL
dimensioni	95(H)*95(D)mm	95(H)*95(D)mm	95(H)*95(D)mm
voltaggio	DC12V 100mA Adapter DC12V1A	DC12V 100mA Adapter DC12V1A	DC12V 100mA Adapter DC12V1A
lente	lowLux	2.5" Dome 1.0Lux/3.6mm	2.5" Dome 1.0Lux/3.6mm
IR led	no	no	no
CCD	633+2010	405AK+3142	38603+2421
involucro	antivandalo	antivandalo	antivandalo



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	MT-004a	MT-004b
descrizione	1/3" Sony Color CCD 520TVL	1/3" Sony Color CCD 420TVL
dimensioni	--	--
voltaggio	DC12V 200mA Adapter DC12V1A	DC12V 200mA Adapter DC12V1A
lente	3.6mm 3Axis bracket 0Lux	3.6mm 3Axis bracket 0Lux
IR led	4EA 10m	4EA 10m
CCD	405AK+3142	639AK+2010
involucro	plastica	plastica



codice	MT-005a	MT-005b	MT-005c	MT-005d
descrizione	1/3" Sony color CCD 540TVL	1/3" Sony Super-HAD 420TVL	1/4" Sony color CCD 420TVL	1/4" Sharp color CCD 420TVL
dimensioni	100*100*68mm	100*100*68mm	100*100*68mm	100*100*68mm
voltaggio	DC12V 120mA Adapter	DC12V 120mA Adapter	DC12V 120mA Adapter	DC12V 120mA Adapter
lente	3.6mm 0.1Lux	3.6mm 0.1Lux	3.6mm 0.1Lux	3.6mm 0.1Lux
IR led	--	--	--	--
CCD	639AK+2010	405AK+3142	227AK+3142	2421BB+38627
involucro	plastica	plastica	plastica	plastica



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	MT-006a	MT-006b	MT-006c
descrizione	1.5inch 1/3" Sony Super-HAD CCD 420TVL	1.5inch 1/3" Sharp color CCD 420TVL	1.5inch 1/4" Sharp color CCD 420TVL
dimensioni	67.3X56mm	67.3X56mm	67.3X56mm
voltaggio	DC12V 120mA Adapter DC12V1A	DC12V 120mA Adapter DC12V1A	DC12V 120mA Adapter DC12V1A
lente	3.6/6mm Unavailable for silk-screen	3.6/6mm Unavailable for silk-screen	3.6/6mm Unavailable for silk-screen
IR led	--	--	--
CCD	405AK+3142	2321+38603	2421+38603
involucro	plastica	plastica	plastica



codice	MT-007a	MT-007b	MT-007c	MT-007d	MT-007e
colore	Nero, argento, baige	Nero, argento, baige	Nero, argento, baige	Nero, argento, baige	Nero, argento, baige
descrizione	1/3" Sony color CCD 540TVL	1/3" Sony Super-HAD CCD 420TVL	1/4" Sony color CCD 420TVL	1/3" Sharp color CCD 420TVL	1/4" Sharp color CCD 420TVL
dimensioni	Ø85*55mm	Ø85*55mm	Ø85*55mm	Ø85*55mm	Ø85*55mm
voltaggio	DC12V120mA AdapterDC12V1A	DC12V120mA AdapterDC12V1A	DC12V120mA AdapterDC12V1A	DC12V120mA AdapterDC12V1A	DC12V120mA AdapterDC12V1A
lente	3.6/6mm1.0Lux Unavailable for silk-screen	3.6/6mm1.0Lux Unavailable for silk-screen	3.6/6mm1.0Lux Unavailable for silk-screen	3.6/6mm1.0Lux Unavailable for silk-screen	3.6/6mm1.0Lux Unavailable for silk-screen
IR led	no	no	no	no	no
CCD	639AK+2010	405AK+3142	227+3142	2321+38603	2421+38603
involucro	plastica	plastica	plastica	plastica	plastica



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	MT-008a	MT-008b	MT-008c
colore	Grigio, bianco	Grigio, bianco	Grigio, bianco
descrizione	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 540TVL	1/3" Sony Color CCD 480TVL
dimensioni	168*96*86mm	168*96*86mm	168*96*86mm
voltaggio	DC12V 400mA DC12V1A	DC12V 400mA DC12V1A	DC12V 400mA DC12V1A
lente	3.6/6/8mm Lens 0Lux	3.6/6/8mm Lens 0Lux	3.6/6/8mm Lens 0Lux
IR led	24×Φ5EA LED 20-30M	24×Φ5EA LED 20-30M	24×Φ5EA LED 20-30M
CCD	639+2040	639+2010	633+2010
involucro	A prova di acqua IP67	A prova di acqua IP67	A prova di acqua IP67



codice	MT-009a	MT-009b	MT-009c
colore	nero	nero	nero
descrizione	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 540TVL	1/3" Sony Color CCD 480TVL
dimensioni	53(L)*Φ35mm	53(L)*Φ35mm	53(L)*Φ35mm
voltaggio	DC12V 340mA DC12V1A	DC12V 340mA DC12V1A	DC12V 340mA DC12V1A
lente	2.8/3.6mm Lens 0Lux Unavailable for silk-screen	2.8/3.6mm Lens 0Lux Unavailable for silk-screen	2.8/3.6mm Lens 0Lux Unavailable for silk-screen
IR led	8×Φ5EA LED 5-10M	8×Φ5EA LED 5-10M	8×Φ5EA LED 5-10M
CCD	639+2040	639+2010	633+2010
involucro	A prova di acqua IP67	A prova di acqua IP67	A prova di acqua IP67



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	MT-010a	MT-010b	MT-010c
descrizione	1/3" Sony Super HAD CCD, 540TVL	1/3" Sony color CCD, 540TVL	1/3" Sony color CCD, 480TVL
dimensioni	61*76*155mm	61*76*155mm	61*76*155mm
voltaggio	DC12V 240mA Adapter DC12V1A	DC12V 240mA Adapter DC12V1A	DC12V 240mA Adapter DC12V1A
lente	HQ1	DaiWon 3.6/6mm 0Lux Lightning proof+bracket	DaiWon 3.6/6mm 0Lux Lightning proof+bracket
IR led	24EA 10-15m	24EA 10-15m	24EA 10-15m
CCD	409AK+3172	639+2010	405AK+2010
involucro	IP66	IP66	IP66



codice	MT-011a	MT-011b	MT-011c
descrizione	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 540TVL	1/3" Sony Color CCD 480TVL
dimensioni	128x90x70mm	128x90x70mm	128x90x70mm
voltaggio	DC12V 300mA Adapter DC12V1A	DC12V 300mA Adapter DC12V1A	DC12V 300mA Adapter DC12V1A
lente	600TVL	3.6mm+bracket	3.6mm+bracket
IR led	23EA20M	23EA20M	23EA20M
CCD	639+2170	639AK+2010	405AK+2010
involucro	IP66	IP66	IP66



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	MT-011d	MT-011e	MT-011f
descrizione	1/3" Sony Super HAD CCD 420TVL	1/4" Sony Color CCD 420TVL	1/4" Sharp Color CCD 420TVL
dimensioni	128x90x70mm	128x90x70mm	128x90x70mm
voltaggio	DC12V 300mA Adapter DC12V1A	DC12V 300mA Adapter DC12V1A	DC12V 300mA Adapter DC12V1A
lente	3.6mm+bracket	3.6mm+bracket	3.6mm+bracket
IR led	23EA20M	23EA20M	23EA20M
CCD	405AK+3142	227AK+3142	38603+2421
involucro	IP66	IP66	IP66



codice	MT-012a	MT-012b
colore	Blu, rosso, bianco, argento	Blu, rosso, bianco, argento
descrizione	1/3" Sony Super HAD CCD,500TVL 0.3Lux (IR on cover 0lux)	1/3" Sony Super HAD CCD,420TVL 0.3Lux(IR on cover 0lux)
dimensioni	D45xL63	D45xL63
voltaggio	DC12V 150mA Adapter DC12V1A	DC12V 150mA Adapter DC12V1A
lente	6mm +bracket Unavailable for silk-screen	6mm +bracket Unavailable for silk-screen
IR led	12EA 15M	12EA 15M
CCD	409AK+4103	405AK+3142
involucro	IP67	IP67



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	MT-013a	MT-013b	MT-013c	MT-013d	MT-013e
descrizione	1/3" Sony Color CCD,600TVL	1/3" Sony Color CCD,540TVL	1/3" Sony Super Had CCD 480TVL	1/3" Sony Super Had CCD 420TVL	1/4" SHARP Color CCD 420TVL
dimensioni	80*Φ58	80*Φ58	80*Φ58	80*Φ58	80*Φ58
voltaggio	DC12V 220mA Adapter DC12V1A	DC12V 220mA Adapter DC12V1A	DC12V 220mA Adapter DC12V1A	DC12V 220mA Adapter DC12V1A	DC12V 220mA Adapter DC12V1A
lente	600TVL	3.6/6mm+bracket	3.6/6mm+bracket	3.6/6mm+bracket	3.6/6mm+bracket
IR led	12EA 10-15m	12EA 10-15m	12EA 10-15m	12EA 10-15m	12EA 10-15m
CCD	409AK+3172	639AK+2010	409AK+4103	405AK+3142	38603+2421
involucro	IP66	IP66	IP66	IP66	IP66



codice	MT-014a	MT-014b	MT-014c
descrizione	1/3" Sony Color CCD 540TVL	1/3" Sony Color CCD 540TVL	1/3" Sony Super-HAD 420TVL
dimensioni	70*57*100 mm	70*57*100 mm	70*57*100 mm
voltaggio	DC12V 300mA Adapter DC12V1A	DC12V 300mA Adapter DC12V1A	DC12V 300mA Adapter DC12V1A
lente	Low Lux 0.05LUX	3.6mm 0Lux+bracket	3.6mm 0Lux+bracket
IR led	23EA 20m	23EA 20m	23EA 20m
CCD	639+2010	405AK+2010	405+3142
involucro	IP55	IP55	IP55



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	MT-014d	MT-014e	MT-014f
descrizione	1/4" Sony Color CCD 420TVL	1/3" Sharp Color CCD 420TVL	1/4" Sharp Color CCD 420TVL
dimensioni	70*57*100 mm	70*57*100 mm	70*57*100 mm
voltaggio	DC12V 300mA Adapter DC12V1A	DC12V 300mA Adapter DC12V1A	DC12V 300mA Adapter DC12V1A
lente	3.6mm 0Lux+bracket	3.6mm 0Lux+bracket	3.6mm 0Lux+bracket
IR led	23EA 20m	23EA 20m	23EA 20m
CCD	227AK+3142	2311+38603	2421+38627
involucro	IP55	IP55	IP55



codice	MT-015a	MT-015b
descrizione	1/3" Sony Color CCD 540TVL 0.02Lux	1/3" Sony Color CCD 480TVL 0.02Lux
dimensioni		40*57*40mm
voltaggio	DC12V 100mA Adapter DC12V1A	DC12V 100mA Adapter DC12V1A
lente	0.02Lux,OSD Anti-flicker Motion Detect Privacy,Mirror	0.02Lux,OSD Anti-flicker Motion Detect Privacy,Mirror
IR led	--	--
CCD	639+2020	405+2020
involucro	--	--



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	MT-016a	MT-016b	MT-016c	MT-016d
descrizione	1/3" Sony Super-HAD CCD 520TVL	1/3" Sony Super-HAD CCD 480TVL	1/3" Sony Super-HAD CCD 420TVL	1/3" Sharp color CCD 420TVL 0.8 Lux
dimensioni	147*96mm	147*96mm	147*96mm	147*96mm
voltaggio	DC12V 110mA Adapter DC12V1A	DC12V 110mA Adapter DC12V1A	DC12V 110mA Adapter DC12V1A	DC12V 110mA Adapter DC12V1A
lente	Iris BLC AGC AWB 0.5Lux Unavailable for silk-screen	Iris BLC AGC AWB 0.5Lux Unavailable for silk-screen	Iris BLC AGC AWB 0.5Lux Unavailable for silk-screen	Iris BLC AGC AWB 0.5Lux Unavailable for silk-screen
CCD	409AK+3172	409AK+4103	405AK+3142	2321+38603



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



TELECAMERE





codice	T-001	T-002
descrizione	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 600TVL
dimensioni	200*171*83mm	
voltaggio	DC12V 1000mA Adapter DC12V1.5A	DC12V 600mA AdapterDC12V1.5A
lente	9-22mm 0Lux	4-9mm 0Lux
IR led	∅ 5*72EA60m	∅ 5*42EA 40m
CCD	639+2170	639+2170
involucro	IP66	IP66



codice	T-003	T-004a	T-004b
descrizione	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 600TVLH.L.I.
dimensioni	--	∅160x84mm	∅160x84mm
voltaggio	DC12V/100mA Adapter DC12V1A	DC12V 600mA AdapterD- C12V1.5A	DC12V 600mA AdapterD- C12V1.5A
lente	3.7-12mm Tamron DC/ICR Lens	42EA 30-35m	42EA 30-35m
IR led	--	∅ 5*42EA 40m	∅ 5*42EA 40m
CCD	639+2170	639+2170	639+2170
involucro	IP57	IP66	IP66



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	T-005a	T-005b
descrizione	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 600TVLH.L.I.
dimensioni	228*97*x82mm	228*97*x82mm
voltaggio	DC12V 600mA AdapterDC12V1.5A	DC12V 600mA AdapterDC12V1.5A
lente	4-9mm 0Lux	4-9mm 0Lux
IR led	42EA 30-35m	42EA 30-35m
CCD	639+2170	639+2170
involucro	IP66	IP66



codice	T-006	T-007	T-008
descrizione	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 600TVLH.L.I.
dimensioni	275*85*110mm	315*125*97mm	228*97*x82mm
voltaggio	DC12V/750mA Adapter DC12V1A	DC12V 600mA AdapterDC12V1.5A	DC12V 400mA AdapterDC12V1.5A
lente	OSD 3D-DNR 8-20mm Auto Iris 0Lux	OSD 3D-DNR 6-15mm Auto Iris 0Lux	OSD 3D-DNR 4-9mm Auto Iris 0Lux
IR led	56EA 60m	48EA 50m	24EA 30m
CCD	639+2170	639+2170	639+2170
involucro	IP66	IP66	IP66



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	T-009	T-010a	T-010b
descrizione	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 600TVL
dimensioni	132.8*85.5*94.6mm	270*164*142mm	270*164*142mm
voltaggio	DC12V/400mA Adapter DC12V1A	DC12V 500mA AdapterDC12V1.5A	DC12V 500mA AdapterDC12V1.5A
lente	3.6/6/8/12/16mm 0.1Lux +bracket	4-9mm 1.0MegaPixel	9-22mm 1.0Mpixel
IR led	42EA 30m	30m	36-45m
CCD	639+2170	639+2170	639+2170
involucro	IP66	IP65	IP65



codice	T-011	T-012a	T-012b
descrizione	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 600TVL
dimensioni	--	--	--
voltaggio	DC12V/330mA Adapter DC12V1A	DC12V 500mA AdapterDC12V1.5A	DC12V 500mA AdapterDC12V1.5A
lente	3.6/6mm 0Lux +bracket	4-9mm 1.0MegaPixel +bracket	4-9mm 1.0MegaPixel +bracket
IR led	24EA 30M	42EA 30m	42EA 30m
CCD	639+2170	639+2170	639+2170
involucro	IP65	IP65	IP65



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	T-013	T-014	T-015
descrizione	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 600TVL Digital Dynamic Range,Light Rejection , 0.0001lux
dimensioni	128x90x70mm	--	170*70*120 mm
voltaggio	DC12V/300mA Adapter DC12V1A	DC12V 220mA AdapterDC12V1.5A	DC12V 275mA AdapterDC12V1.5A
lente	3.6mm +bracket	3.6/6mm +bracket	OSD 3.6/6mm +bracket
IR led	23EA 20M	12EA 10-15m	26EA 25M
CCD	639+2170	639+2170	639+2170
involucro	IP66	IP66	IP55



codice	T-016	T-017	T-018
descrizione	1/3" Sony Color CCD 600TVL Digital Dynamic Range,Light Rejection ,0.0001lux	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 600TVLH.L.I.
dimensioni	160*100*97mm	--	100*100*68mm
voltaggio	DC12V/400mA Adapter DC12V1A	DC12V 280mA AdapterDC12V1.5A	DC12V 120mA AdapterDC12V1.5A
lente	OSD 4-9mm +bracket	3.6/6/8mm 0Lux	3.6mm 0.1Lux
IR led	48EA 50M	Φ5*21 15-20M	--
CCD	639+2170	639+2170	639+2170
involucro	IP55	A prova di vandalo	plastica



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14


26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	T-019	T-020	T-021
descrizione	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 600TVL4-9mm DaiWon Manual Iris
dimensioni	Ø 91x128mm	Ø 91x128	Ø150*107mm
voltaggio	DC12V/150mA Adapter DC12V1A	DC12V 300mA AdapterDC12V1.5A	DC12V 240mA AdapterDC12V1.5A
lente	3.5-8mm 3Axis bracket	3.5-8mm 3Axis bracket 0Lux	0Lux OSD Anti-flicker Motion Detect Privacy,Mirror
IR led	17EA 20m	--	-- 25M
CCD	639+2170	639+2170	CNB+639BK/638BK
involucro	plastica	plastica	--

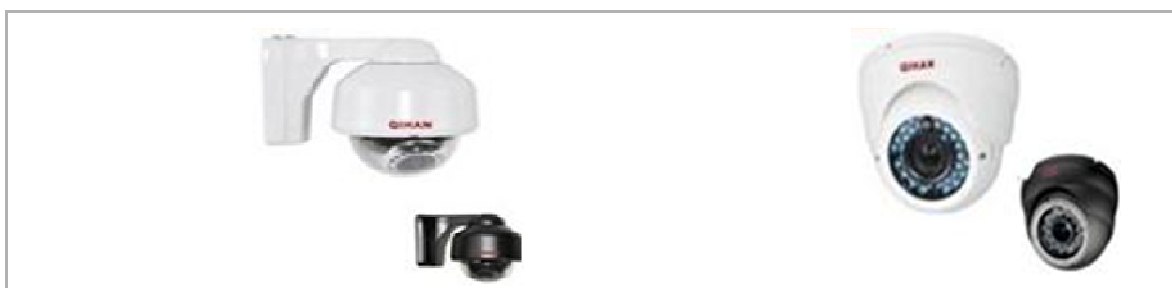

codice	T-022a	T-022b	T-023
descrizione	1/3" Sony Color CCD 600TVL Digital Dynamic Range,Light Rejection ,0.0001lux	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 600TVLH.L.I.
dimensioni	Ø150*185.5mm	Ø150*185.5mm	Ø120*80mm
voltaggio	DC12V/150mA Adapter DC12V1A	DC12V/150mA Adapter DC12V1A	DC12V/370mA Adapter DC12V1A
lente	3.5-8mm 3Axis bracket 0Lux		3.6mm 0.1Lux
IR led	--	17EA 20m	36EA 40M
CCD	639+2170	639+2170	639+2170
involucro	A prova di vandalo	A prova di vandalo	A prova di vandalo



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	T-024	T-025a	T-025b
descrizione	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 600TVL	1/3" Sony Color CCD 600TVL
dimensioni	Ø95*73mm	--	--
voltaggio	DC12V/300mA Adapter DC12V1A	DC12V 300mA AdapterDC12V1.5A	DC12V 370mA AdapterDC12V1.5A
lente	3.6,6,8mm 0.8Lux	3.6/6mm 0Lux	4-9mm 0Lux
IR led	20EA 20m	23EA 20m	36EA 40M
CCD	639+2170	639+2170	CNB+639BK/638BK
involucro	A prova di vandalo	A prova di vandalo	A prova di vandalo



codice	T-026	T-027
descrizione	1/3"Sony DS Color CCD 600TVL Color Model: 0.003(0.6) Lux(Sens-up OFF) 3D-DNR,Motion Detection,Privacy,Mirror,FLIP,Freeze,Sharpness, Stabilizer,6X Digital Zoom	1/3" Sony Color CCD 600TVL Ultra Low Illumination,strong Light inhibited : Color 0.3lux B/W 0.005Lux RS-485 remote control
dimensioni	42*42*1.2mm	138*68*56mm
voltaggio	DC12V 200mA Adapter DC12V1.5A	DC12V 450mA AdapterDC12V1.5A
lente	WDR OSD	OSD 3D-DNR CS mount Iris 0.3Lux
IR led	--	--
CCD	639+KT600	639+2170
involucro	--	--



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	T-028	T-029	T-030
descrizione	1/3" Sony Effio-E 960H Exview CCD Maximum 700TVL	1/3" Sony Effio-E 960H Exview CCD Maximum 700TVL	1/3" Sony Effio-E 960H Exview CCD Maximum 700TVL
dimensioni	200*171*83mm	200*171*83mm	163*67*112.5mm
voltaggio	DC12V/300mA Adapter DC12V1A	DC12V 300mA AdapterDC12V1.5A	DC12V 370mA AdapterDC12V1.5A
lente	9-22mm 0Lux	4-9mm 0Lux	3.6/6mm +bracket 0Lux
IR led	∅ 5*72EA 60m	∅ 5*42EA 40m	23/30EA
CCD	SONY CCD 673 + SONY DSP 4127GG	SONY CCD 673 + SONY DSP 4127GG	SONY CCD 673 + SONY DSP 4127GG
involucro	IP66	IP66	IP57



codice	T-031	T-032	T-033
descrizione	1/3" Sony Effio-E 960H Exview CCD Maximum 700TVL	1/3" Sony Effio-E 960H Exview CCD Maximum 700TVL	1/3" Sony Effio-E 960H Exview CCD
dimensioni	155*65*129mm	125*78*72	256x86x143 mm
voltaggio	DC12V/300mA Adapter DC12V1A	DC12V 400mA AdapterDC12V1.5A	DC12V 400mA AdapterDC12V1.5A
lente	3.6/6mm +bracket 0Lux	3.6/6/8mm +bracket 0.1ux	4-9mm OSD option +bracket
IR led	23/30EA	30EA 25~30 M	36EA 30M
CCD	SONY CCD 673 + SONY DSP 4127GG	SONY CCD 673 + SONY DSP 4127GG	SONY CCD 673 + SONY DSP 4127GG
involucro	IP57	IP66	IP57



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



HOT



codice	T-034	T-035	T-036
descrizione	1/3" Sony Effio-E 960H Exview CCD Maximum 700TVL	1/3" Sony Effio-E 960H Exview CCD Maximum 700TVL	1/3" Sony Effio-E 960H Exview CCD Maximum 700TVL
dimensioni	590x360x200mm	Ø 92*80mm	120*60*31mm
voltaggio	DC12V/900mA Adapter DC12V1A	DC12V 300mA AdapterDC12V1.5A	DC12V 120mA AdapterDC12V1.5A
lente	9-22mm White Color +bracket	3.6/6mm 0Lux	3.7mm 0.8Lux Pinhole lens
IR led	12EA 80M	20EA 15M	--
CCD	SONY CCD 673 + SONY DSP 4127GG	SONY CCD 673 + SONY DSP 4127GG	SONY CCD 673 + SONY DSP 4127GG
involucro	IP66	plastica	plastica



codice	T-037	T-038	T-039
descrizione	1/3" Sony Effio-E 960H Exview CCD Maximum 700TVL	1/3" Sony Effio-E 960H Exview CCD Maximum 700TVL	1/3" Sony Effio-E 960H Exview CCD
dimensioni	Ø85*55mm	Ø 140 x 100(H)	138(w)x98(h)mm
voltaggio	DC12V/120mA Adapter DC12V1A	DC12V 160mA AdapterDC12V1.5A	DC12V 290mA AdapterDC12V1.5A
lente	3.6/6mm 1.0Lux	4-9mm 0.1 LUX	4-9mm 1.0Lux
IR led	--	--	--
CCD	SONY CCD 673 + SONY DSP 4127GG	SONY CCD 673 + SONY DSP 4127GG	SONY CCD 673 + SONY DSP 4127GG
involucro	plastica	A prova di vandalo	A prova di vandalo



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it

3-Axis

codice	T-040	T-041	T-042
descrizione	1/3" Sony Effio-E 960H Exview CCD Maximum 700TVL	1/3" Sony Effio-E 960H Exview CCD Maximum 700TVL	1/3" Sony Effio-E 960H Exview CCD Maximum 700TVL
dimensioni	62*60*121mm	Φ95*73mm	96x96x63 mm
voltaggio	DC12V/200mA Adapter DC12V1A	DC12V 300mA AdapterDC12V1.5A	DC12V 400mA AdapterDC12V1.5A
lente	4-9mm Lens 0.1 lux 3Axis bracket	3.6/6mm 0Lux	4.5" Pan Focus 4-9mm
IR led	--	23EA 20m	36pcs 30M
CCD	SONY CCD 673 + SONY DSP 4127GG	SONY CCD 673 + SONY DSP 4127GG	SONY CCD 673 + SONY DSP 4127GG
involucro	A prova di vandalo	A prova di vandalo	A prova di vandalo

HOT

codice	T-043	T-044
descrizione	1/3" Sony Effio-E 960H Exview CCD Maximum 700TVL	1/3" Sony Effio-E 960H Exview CCD Maximum 700TVL
dimensioni	94x94x69 mm	Φ120*80mm
voltaggio	DC12V 300mA Adapter DC12V1A	DC12V 370mA Adapter DC12V1A
lente	2.5" Casing 3.6mm 0Lux	4-9mm 0Lux
IR led	23EA 20m	36EA 40M
CCD	SONY CCD 673 + SONY DSP 4127GG	SONY CCD 673 + SONY DSP 4127GG
involucro	A prova di vandalo	A prova di vandalo

**ETC – ECOLOGY**

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it



codice	T-045	T-046
descrizione	1/3" Sony Effio-E 960H Exview CCD Maximum 700TVL	1/3" Sony Effio-E 960H Exview CCD Maximum 700TVL
dimensioni	Φ140*95mm	210X82mm
voltaggio	DC12V 370mA Adapter DC12V1A	DC12V 300mA Adapter DC12V1A
lente	5-15mm 9-22mm 0Lux	2.5" 4-9mm 0.1LUX +bracket
IR led	54EA 40-50M	--
CCD	SONY CCD 673 + SONY DSP 4127GG	SONY CCD 673 + SONY DSP 4127GG
involucro	A prova di vandalo	A prova di vandalo



ETC – ECOLOGY

Soluzioni Energia Tecnologia

Via delle industrie, 14

26010 BAGNOLO CREMASCO (CR)

Telefono 0373 648425—Fax 0373 227002

www.etc-ecology.it info@etc-ecology.it